



RFU-600-6


PART NO.

REV	DESCRIPTION	DWNN	DATE	APPROVED
-	ENGINEERING RELEASE	CZS	6/29/01	JDMc
A	ADDED CRIMP DIES	CZS	08/26/08	JDMc

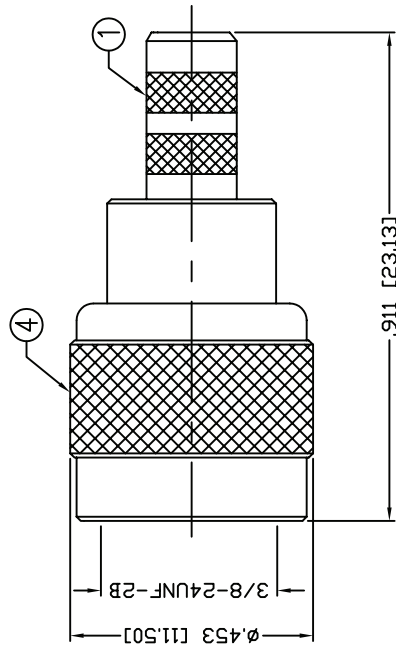

RECOMMENDED CRIMP DIE: .068"

RECOMMENDED CRIMP DIE: 213"

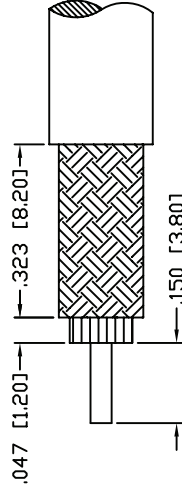

RECOMMENDED STRIPPING INSTRUCTIONS

SPECIFICATIONS:

IMPEDANCE: 50 Ohms
 FREQUENCY RANGE: 0-2.5 GHz
 VSWR: 1.25 MAX.
 WORKING VOLTAGE: 335 V rms Max. @ Sea Level
 INSULATION RESISTANCE: 5k M Ohms min.
 TEMPERATURE RANGE: -65°C TO 165°C
 FOR RG-58, 58A, 58C, 141, 141A, BELDEN 8240, 9907
 8259, 8262, 9201, 9203, 9310, 9311 & COMM/SCOPE 0268

#	DESCRIPTION	QTY	MATERIAL	FINISH
5	FERRULE	1	BRASS	NICKEL, 100μ"
4	SHELL	1	BRASS	NICKEL, 100μ"
3	PIN	1	BRASS	SILVER 5μ"
2	INSULATOR	1	PIFE	---
1	BODY	1	BRASS	NICKEL, 100μ"

CUSTOMER OUTLINE DRAWING

ALL DIMENSIONS ARE REFERENCE ONLY		08/26/08
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MILLIMETERS]		
DRAWN C. ZUNIGA	CHECKED	9/10/02
ORJ DRAWN C. ZUNIGA		

ROHS COMPLIANT

PROPRIETARY AND CONFIDENTIAL
 THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES. ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES. ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

RFconnectors
 DIVISION OF RF INDUSTRIES, LTD. (858) 549-6340 FAX
 7610 MIRAMAR RD.
 SAN DIEGO, CA 92126

MINI UHF PLUG

SIZE	CABLE GROUP	DWG NO.	REV
A	C	RFU-600-6	A
SCALE:	ENGINEERING ID:	SHEET	1 OF 1
NTS	001560		